



Light Promo **Worklighting**

Professional | Standard



Magnum Battery XS

IK09



- Nominal power: 20 W
- Colour temperature: 4000 K
- **Luminaire's luminous flux [lm]: 2300 lm**
- Compatible with Bosch Professional 18V System
- Made of impact-resistant polypropylene (PP)
- Equipped with a switch enabling 4-step regulation of luminous flux.
- Battery discharge indicator
- Battery-based operating mode for a 2Ah battery:
 - 200 lm, working time: 15 h
 - 750 lm, working time: 5 h
 - 1500 lm, working time: 2 h 30 min
 - 2300 lm, working time: 1 h 30 min

249006	Magnum Battery XS	99,50 EUR
--------	-------------------	-----------

Magnum Battery M

IK10



- Nominal power: 30 W
- Colour temperature: 4000 K
- **Luminaire's luminous flux [lm]: 4050 lm**
- Compatible with Bosch Professional 18V System
- Made of impact-resistant polypropylene (PP)
- Equipped with a switch enabling 4-step regulation of luminous flux.
- Battery discharge indicator
- Battery-based operating mode for a 2Ah battery:
 - 500 lm, working time: 9 h
 - 1850 lm, working time: 2 h 30 min
 - 2750 lm, working time: 1 h 30 min
 - 4050 lm, working time: 1 h

249228	Magnum Battery M	134,50 EUR
--------	------------------	------------

Magnum Battery L

IK10



- Nominal power: 70 W
- Colour temperature: 4000 K
- **Luminaire's luminous flux [lm]: 9250 lm**
- Compatible with Bosch Professional 18V System
- Made of impact-resistant polypropylene (PP)
- Equipped with a switch enabling 4-step regulation of luminous flux.
- Battery discharge indicator
- Battery-based operating mode for a 2Ah battery:
 - 1000 lm, working time: 5 h
 - 3800 lm, working time: 1 h 15 min
 - 5650 lm, working time: 45min
 - 9250 lm, working time: 25min

249259	Magnum Battery L	174,50 EUR
--------	------------------	------------

Tower Lite MultiBattery

IK07



- **Luminaire's luminous flux [lm]: 10285 lm**
- Nominal power: 68 W
- Colour temperature: 4000 K
- Compatible with Bosch Professional 18V System
- Equipped with a switch enabling 4-step regulation of luminous flux
- Battery-based operating mode for a 2Ah battery:
 - 1099 lm, working time: 5 h
 - 3200 lm, working time: 1 h 15 min
 - 6430 lm, working time: 45min
 - 10285 lm, working time: 30min
- Dimensions: 1130/263/169 mm
- Luminaire net weight: 4500 g

250248	Tower Lite MultiBattery	249,50 EUR
--------	-------------------------	------------





Accessories for luminaires from the Magnum Battery and Tower Lite MultiBattery series

When purchasing a Magnum Battery or Tower Lite MultiBattery luminaire, the following accessories are available at a promotional price:

000737	2 m Future Stand with Click Head system (quick installation of luminaires)	44,90 EUR
249150	AmpShare 18 V 2 Ah battery	31,50 EUR
016011	Set of 2 AmpShare 18 V 2 Ah batteries	60,00 EUR
249167	AmpShare 18 V 5 Ah battery	74,50 EUR
016028	Set of 2 AmpShare 18 V 5 Ah batteries	144,50 EUR
249174	AmpShare GAL 18V-40-EU quick charger	29,50 EUR



AmpShare 18 V batteries



- AMPShare 18 V is a slide-in battery offering long-lasting performance and efficient usage
- AMPShare batteries are fully compatible with all power tools across multiple brands, including those within the 18 V professional system of Bosch, Lena Lighting S.A., Rothenberger, Fein, and many more.
- The CoolPack housing protects the cells against excessive heating.
- The AMPShare Li-Ion battery has no memory effect or self-discharge function.
- AMPShare batteries are equipped with an "Electronic Cell Protection (ECP)" system", which safeguards against deep discharge and protects the battery cells in the event of a charging process interruption, without the risk of damaging the battery, which ensures that the power tool will be shut down by the protective circuit.
- Unmatched performance, long working time, exceptional durability – and likely the world's fastest charging technology.
- You no longer need to buy new batteries for each new power tool. You no longer have to search for the "right" battery. With the AMPShare platform, you only need one battery.

AmpShare 18 V quick charger



The AMPShare charger is a compact design that allows fast charging of AMPShare 18 V batteries. Impressive charging speed (18 V / 2.0 Ah to 80% within 36 minutes) enables interchangeable use of any battery set, ensuring continuous work. Compact dimensions make it suitable for easy transportation. Intuitive operation allows for effortless battery connection to the charger, and the straightforward labelling system provides clear information about the tool's status.

Key features of the AMPShare charger:

- Compact design
- Flexible Power System: compatibility with all AMPShare 18 V batteries
- AMPShare batteries are fully compatible with all power tools across multiple brands.

Giant LED EVO

IP54 IK10



- **Luminaire's luminous flux [lm]:**
33144/45000 lm
- Light source:
High-performance SMD LED
- Power: 227/300W
- Impact-resistant body and ergonomic handle
- Anti-glare diffuser made of polycarbonate
- Rubber cable H07RN-F 3x1.5mm² (5m)
- Two sockets for connecting other electrical devices or connecting luminaires in series
- Weight: 5300/5500 g
- Dimensions: 740/420/320 mm

901256	Giant LED EVO 227 W (schuko sockets)	249,50 EUR
901263	Giant LED EVO 227 W (french sockets)	249,50 EUR
901294	Giant LED EVO 300 W (schuko sockets)	319,50 EUR
901300	Giant LED EVO 300 W (french sockets)	319,50 EUR

Magnum Future LED XL

IP54 IK10



- **Luminaire's luminous flux [lm]:**
6500 / 11000 / 14000 lm
- Nominal power: 50 / 78 / 105 W
- Colour temperature: 4000 K
- Nominal supply voltage 220-240 V
- Rubber cable H07RN-F 3x1.5 mm² (5 m)
- Switch
- Two sockets for connecting other electrical devices or connecting luminaires in series
- Dimensions: 300/480/75 mm
- Luminaire net weight:
3400/3600/3700 g

247453	MF LED XL 50 W (schuko socket)	114,50 EUR
247460	MF LED XL 50 W (french socket)	114,50 EUR
248931	MF LED XL 78 W (schuko socket)	139,50 EUR
248955	MF LED XL 78 W (french socket)	139,50 EUR
244582	MF LED XL MAX 105 W (schuko socket)	154,50 EUR
244575	MF LED XL MAX 105 W (french socket)	154,50 EUR



Magnum Future LED 32W

IP54 IK10



- **Luminaire's luminous flux [lm]:**
4300 lm
- Nominal power: 32 W
- Colour temperature: 4000 K
- Nominal supply voltage:
220-240 V
- Rubber cable H07RN-F 3x1.5mm² (5m)
- Two sockets for connecting other electrical devices or connecting luminaires in series
- Switch
- Dimensions: 300/400/100 mm
- Illumination angle: 120°
- Luminaire net weight: 2900 g

247057	Magnum Future LED 32W (schuko sockets)	89,50 EUR
247040	Magnum Future LED 32W (french sockets)	89,50 EUR

Magnum Future LED XS 20W Cable / Accu

IP54 IK10



- **Luminaire's luminous flux [lm]:**
2000 / 2300 lm
- Nominal power: 20 W
- Colour temperature: 4000 K
- Nominal supply voltage:
220-240 V / 18 V
- H07RN-F 3x1.5 mm² (3 m) rubber cable or built-in Li-Ion 18.5 V (2200 mAh) battery
- 21 V 50/60 Hz 1 A external charger
- Dimensions: 192/193/123 mm
- Luminaire net weight: 1100 g

248405	Magnum Future LED XS 20W (with one schuko socket)	55,90 EUR
248368	Magnum Future LED XS 20W (with one french socket)	55,90 EUR
248511	Magnum Future LED XS Accu	134,50 EUR

Tower Lite LED 94 W

IP54 IK07



- Luminaire's luminous flux [lm]: **9200 lm**
- Nominal power: 94 W
- Colour temperature: 4000 K
- Nominal supply voltage 220-240 V
- H07RN-F 2x1 mm² (3 m) rubber cable
- Dimensions: 1130/263/169 mm
- Luminaire net weight: 4700 g

622359	Tower Lite LED 94 W	149,50 EUR
--------	---------------------	------------

Tower Lite MultiBattery

IP20 IK07



- Luminaire's luminous flux [lm]: **10285 lm**
- Nominal power: 68 W
- Colour temperature: 4000 K
- Compatible with Bosch Professional 18V System
- Equipped with a switch enabling 4-step regulation of luminous flux
- Battery-based operating mode for a 2Ah battery:
 - 1099 lm – 5 h
 - 3200 lm – 1 h 15 min
 - 6430 lm – 45 min
 - 10285 lm – 30 min
- Dimensions: 1130/263/169 mm
- Luminaire net weight: 4500 g

250248	Tower Lite MultiBattery	249,50 EUR
--------	-------------------------	------------

Plaster Lite Future LED

IP54 IK07



- The basic tool of every foreman applying plaster and finishing coat**
- Nominal power: 49 W
 - Colour temperature: 4000 K
 - Luminaire's luminous flux [lm]: 6400 lm
 - Nominal supply voltage: 220-240 V
 - Luminaire net weight: 3500 g
 - Rubber cable H07RN-F 3x1.5 mm² (5 m)
 - Fast assembly on a stand possible index no: 000737

359217	Plaster Lite Future LED	159,50 EUR
--------	-------------------------	------------

Flex Line LED

IP44 IK07



- Construction LED strip – perfect lighting for the construction site**
- Luminaire's luminous flux [lm]:
 - 10 m variant – 6630 lm
 - 15 m variant – 9945 lm
 - 20 m variant – 13260 lm
 - LED quantity: 120 pcs/m
 - Nominal power: 8 W/m
 - Colour temperature: 4000 K
 - Nominal supply voltage 220-240 V
 - 1.5 m H07RN-F 2x1.5 mm² power cord
 - Luminaires can be connected in series

608728	Flex Line LED 10 m	44,50 EUR
608735	Flex Line LED 15 m	64,50 EUR
608742	Flex Line LED 20 m	84,50 EUR

Flato LED M

IP54 IK08



- Luminaire's luminous flux [lm]: **1750 lm**
- Nominal power: 17 W
- Colour temperature: 4000 K
- Nominal supply voltage 220-240 V
- H07RN-F 2x1 mm² (3 m) rubber cable
- Luminaire with an arm available as option
- Dimensions: 132/185/74 mm
- Luminaire net weight: 650 g

622021	Flato LED M	22,50 EUR
622427	Flato LED M with an arm	27,50 EUR

Flato LED L

IP54 IK07



- Luminaire's luminous flux [lm]: **4600 lm**
- Nominal power: 47 W
- Colour temperature: 4000 K
- Nominal supply voltage 220-240 V
- H07RN-F 2x1 mm² (3 m) rubber cable
- Dimensions: 236/261/64 mm
- Luminaire net weight: 1000 g

622199	Flato LED L	42,50 EUR
--------	-------------	-----------

Future Ball LED

IP54 IK10



- 360° light distribution – a perfect choice for painters and plasterer**
- Luminaire's luminous flux [lm]: 2400 lm
 - Nominal power: 20 W
 - Colour temperature: 4000 K
 - Nominal supply voltage 220-240 V
 - H07RN-F 3x1.5 mm² (5 m) rubber cable
 - Switch
 - Two sockets for connecting other electrical devices or connecting luminaires in series
 - Dimensions: 244/237/236 mm
 - Luminaire net weight: 1700 g

619212	Future Ball LED 20W (schuko sockets)	89,50 EUR
619236	Future Ball LED 20W (french sockets)	89,50 EUR

Future Line LED

UNTIL STOCK LAST

IP44 IK09



- Construction LED lighting line – perfect lighting for construction sites and scaffolding**
- Luminaire's luminous flux [lm]:
 - 3x7 W variant – 1860 lm
 - 4x7 W variant – 2480 lm
 - Luminaire's length: 3x7 W – 9 m, 4x7 W – 11.5 m
 - Colour temperature: 5000 K
 - Nominal supply voltage 220-240 V
 - Luminaires can be connected in series

255335	Future Line LED 3x7 W	54,50 EUR
255304	Future Line LED 4x7 W	64,50 EUR
255328	Future Line LED 3x7 W with a magnet	56,50 EUR

Pelican Evo LED



- Light source: 2W LED (head) + 5W LED + 4x1 W SMD (main source)
- Max. luminous flux: 800 lm
- Colour temperature: 6500 K
- 100-240 AC/DC 5 V 1 A + 1.5 m micro USB charger included
- 3.7 V 4400 mAh Li-Ion battery
- Working time with max. luminous flux: 5 h
- Strong magnetic fastener in the base
- Battery charge and discharge indicator
- Lamp movable in the range of 120°
- Weight: 340 g

608582 Pelican EVO LED 44,50 EUR

Crane COB LED



- Light source: 5 W COB LED + 1 W SMD LED (top)
- Luminous flux: 5 W COB - 450 lm, 1 W SMD - 120 lm
- Strong magnetic fastener in the base
- Protection class III
- 100-240 AC/DC 5 V 1 A + 1,5 m Type C USB charger included
- 3.7 V 2600 mAh Li-Ion battery
- Battery charge and discharge indicator
- Lamp movable in the range of 120°
- Charging time: 3 h
- Working time (battery): 3 h

334764 Crane COB LED 44,50 EUR

Profi Service Set Accu LED



Luminaire with an arm for under-hood works – adjustable width from 117 to 197 cm

- Luminaire's luminous flux: max. 2000 lm
- Working time: 500 lm/ 4 h; 1000 lm/ 2 h; 2000 lm/ 1 h
- Light source: 50x SMD LED
- 3.7 V 4800 mAh Li-Ion battery
- Charging time: 4 h
- Replaceable battery: Option to charge the battery separately (outside the luminaire) or to purchase an spare battery
- Dimensions: 1170/110 mm
- Weight: 1100 g

334788 Profi Service Set Accu LED 119,00 EUR

Cyclop LED



- Light source: COB LED
- Lighting time: 300 lm - 2.5 h, 150 lm - 4 h
- Top element movable in the range of 60°
- Protection class III
- 1 m Type C charging cable included
- Dimensions: 78/475/42 mm
- Weight: 110 g
- 3.7 V 1500 mAh Li-Ion battery
- Luminaire fitted with a motion sensor
- Non-slip strip

334689 Cyclop LED 34,50 EUR

Crop Future LED



- Light source: 4 W COB LED + 4 W SMD LED (head)
- Lighting time: 400 lm - 3.5 h, 120 lm - 10 h
- Protection class III
- Type C 1 m USB charging cable included
- Ingress protection class: IP54
- Dimensions: 255/58/45 mm
- Weight: 110 g
- 3.7 V 2600 mAh Li-Ion battery
- Charging time: 3 h
- Magnet in the base of the luminaire

608599 Crop Future LED 34,50 EUR

Mustang LED



A perfect solution for Car detailing - it perfectly highlights "holograms" and the unfinished body surface.

- Lighting time: 1000 lm - 1.5 h, 60 lm - 24 h
- Luminous flux: 60 - 1000 lm
- Strong magnetic fastener in the base
- 100-240 AC/DC 5 V 1 A USB charger included
- 3.7 V 5200 mAh Li-Ion battery
- Charging time: 4 h
- Battery charge and discharge indicator
- Lamp movable in the range of 120°
- Weight: 450 g

334672 Mustang LED 64,50 EUR

Head Multi LED




A headlamp that allows for detaching the lighting unit from the headband and using it as an independent torch.

- Luminaire's luminous flux: max. 500 lm
- Light source: COB LED
- 1 m USB-C charging cable included
- Dimensions: 99/50/61 mm
- Weight: 120 g
- 3.7 V 1500 mAh Li-Ion battery
- Luminaire equipped with a motion sensor
- Non-slip strip
- Charging time: 4.5 h
- Working time (battery): 6 h

334498 Head Multi LED 34,50 EUR

Clima Evo UV



Luminaire for diagnosing air conditioning leaks

- Power: 1 W
- Light source: UV LED
- Aluminium body
- High ingress protection – IP54
- OFF switch in the body
- Set includes:
 - a black strip
 - batteries (6xAAA)
 - UV protective glasses
- Weight: 200 g

608575 Clima Evo UV 21,50 EUR

Magnum MultiBattery

A new innovative system that allows you to use the luminaire with various battery systems. If you are a user of wireless tools and you have **Bosch 18V Professional** batteries, this luminaire is for you. When you buy Magnum with a MultiBattery system, you are able to use the batteries you already have.

You can choose from the following variants:



Magnum XS MultiBattery
2300 lm



Magnum M MultiBattery
4050 lm



Magnum L MultiBattery
9250 lm

249549	Magnum MultiBattery XS for Bosch 18V batteries	99,50 EUR
249556	Magnum MultiBattery M for Bosch 18V batteries	139,50 EUR
249563	Magnum MultiBattery L for Bosch 18 V batteries	179,50 EUR
250248	Tower Lite MultiBattery for Bosch 18 V batteries	249,50 EUR



Adapters compatible with:

Magnum
MultiBattery XS



608681	Adapter for Makita 18 V battery	19,50 EUR
608650	Adapter for Milwaukee 18 V and DeWalt 18 V batteries	19,50 EUR

Adapters compatible with:

Magnum
MultiBattery M

Magnum
MultiBattery L

Tower Lite
MultiBattery



608827	Adapter Festool 18 V	14,50 EUR
608803	Adapter Milwaukee / DeWalt 18 V	14,50 EUR
608810	Adapter Makita 18 V	14,50 EUR
608841	Adapter Metabo 18 V	14,50 EUR
608858	Adapter Hikoki 18 V	14,50 EUR
608834	Adapter Hilti 22 V	14,50 EUR

Handy Future LED



Lightweight and compact LED workplace luminaire

- Light source: 3 W COB LED + 3 W LED
- Luminous flux: 60 and 150 lm
- Strong magnetic fastener in the base
- Robust body
- 2 lighting modes
- Ingress protection class: IP20
- Swivel hook
- Charging time: 3.5 h
- Lighting time: 2.5 h
- Battery charge indicator
- The set includes a Type C charging cable
- Dimensions: 155x40x20 mm

608551	Handy Future LED	14,00 EUR
--------	------------------	-----------

Handy Multi LED



POWER BANK function

- Light source: 5 W COB LED + 2x3 W LED
- Luminous flux: 240 and 400 lm
- Strong magnetic fastener in the base
- Robust body
- Battery charge indicator
- Ingress protection class: IP40
- Charging time: 3.5 h
- Lighting time: 2.5 – 4 h
- Smooth dimming and brightening
- POWER BANK function – enables to recharge other battery devices
- The set includes a Type C charging cable
- Dimensions: 150x48x39 mm

608568	Handy Multi LED	24,50 EUR
--------	-----------------	-----------



Magnum Basic 50 / 78 W

- Ingress protection class: IP54
- Impact resistance: IK10
- Luminaire rated power: 50 / 78 W
- Colour temperature: 4000 K
- Luminaire's luminous flux [lm]: 5500 / 9500 lm
- Nominal supply voltage: 220-240 V
- Rubber cable H07RN-F 3x1.5 mm² (3 m)
- One socket for connecting other electrical devices or connecting luminaires in series
- Diffuser material: PC
- Luminaire net weight: 3000 g

406485	Magnum Basic 50W (schuko socket)	79,00 EUR
406478	Magnum Basic 50W (french socket)	79,00 EUR
406522	Magnum Basic 78W (schuko socket)	104,00 EUR
406546	Magnum Basic 78W (french socket)	104,00 EUR

Handy Slim LED



Slim version for hard-to-reach places

- Light source: COB LED
- Luminous flux up to 360 lm
- Strong magnetic fastener in the base
- Protection class III
- Swivel hook
- 3.7 V 2000 mAh Li-Ion battery
- Luminaire covered with rubber
- 4.5 hours of battery life
- Battery charge indicator
- Smooth dimming and brightening
- The set includes a Type C charging cable
- Dimensions: 150x36x31 mm

608698	Handy Slim LED	19,50 EUR
--------	----------------	-----------

Optim LED



A classic in its genre

- Light source: SMD LED
- Luminous flux: 230 lm
- Power: 2 W
- Ingress protection class: IP20
- Protection class: II
- Cover made of PVC
- Lid and handle made of PP
- Swivel hanger
- Weight: 400 g
- Cord: 5 m H05W-F 2x0,75 m²

205958	Optim LED	12,50 EUR
--------	-----------	-----------

Magnum Basic 32W



- Ingress protection class: IP54
- Impact resistance: IK10
- Luminaire rated power: 32 W
- Colour temperature: 4000 K
- Luminaire's luminous flux [lm]: 3600 lm
- Nominal supply voltage: 220-240 V
- Rubber cable H07RN-F 3x1.5 mm² (3 m)
- One socket for connecting other electrical devices or connecting luminaires in series
- Diffuser material: PC
- Luminaire net weight: 2000 g

406423	Magnum Basic 32W (schuko socket)	54,00 EUR
406416	Magnum Basic 32W (french socket)	54,00 EUR

Magnum Basic XS 20W



- Ingress protection class: IP54
- Impact resistance: IK10
- Nominal power: 20 W
- Colour temperature: 4000 K
- Luminaire's luminous flux [lm]: 1600 lm
- Nominal supply voltage: 220-240 V
- H07RN-F 2x1 mm² (3 m) rubber cable
- Diffuser material: PC
- Illumination angle: 120°
- Luminaire net weight: 1000 g

256943	Magnum Basic XS 20W	39,00 EUR
--------	---------------------	-----------



IP44 drum extension cords

Professional construction extension cords are specialised extension cords intended for use on construction sites or in workshops. The rubber cable is wound on a drum to facilitate its coiling and transportation. The high ingress protection (IP44) also allows it to be used outdoors in different weather conditions.

Our extension cords are characterised by the following features:

- Regardless of the cable's length, they allow for quick unwinding and coiling
- Thanks to their well-thought-out design, drum extension cords are easy to use and significantly improve working comfort.
- The extension cord is suitable for use in workshops, on construction sites, for household purposes, and for garden works
- The extension cord features a built-in thermal switch to prevent overheating
- The IP44 outlets with are equipped with covers, allowing for outdoor use in different weather conditions
- The drum features a cable handle and a brake mechanism to prevent accidental and excessive unwinding of the extension cord
- It is perfect for connecting various electrical devices such as power tools, lawnmowers, vacuum cleaners, construction equipment, and many more
- It is made of a flexible cable that facilitates coiling

3 m steel stand

Professional steel stand for heavy loads

- Height when extended: 3 m, folded: 1.2 m
- Height Leg spacing: 134 cm
- Pipe (leg) diameter: 2, 5 cm
- Load capacity: 30 kg
- Weight: 5400 g
- Colour: black
- Available version with mounts to attach the stand to the ground
- Accessories available:
 - Single crossbar for mounting the Giant luminaire
 - CLICK HEAD system enabling quick installation of the luminaires



000294	3 m steel stand	74,00 EUR
250385	3 m stand with securing mounts	78,00 EUR
000300	Crossbar for mounting the Giant luminaire on a stand	29,50 EUR
000812	CLICK HEAD system enabling quick installation of the luminaires	14,90 EUR

2 m stand with CLICK HEAD function

Professional 2 m stand with a quick-mount head for luminaires

- Future Stand with Click Head system
- Stand enabling tool-free and quick assembly of all luminaires from the Magnum Future family
- Height when extended: 200 cm
- Height when folded: 108 cm
- Leg spacing: 92 cm
- Pipe (leg) diameter: 3.5 cm
- Load capacity: 15000 g
- Weight: 2300 g
- Colour: black
- Accessories available:
 - CLICK HEAD system enabling quick installation of the luminaires




000737	Future Stand	59,50 EUR
000812	CLICK HEAD system enabling quick installation of the luminaires	14,90 EUR



612343	IP44 25 m H07RN-F 3G1.5 mm ² reel extension cord (schuko standard)	59,00 EUR
612381	IP44 25 m H07RN-F 3G1.5 mm ² reel extension cord (french standard)	59,00 EUR
612350	IP44 40 m H07RN-F 3G1.5 mm ² reel extension cord (schuko standard)	79,00 EUR
612398	IP44 40 m H07RN-F 3G1.5 mm ² reel extension cord (french standard)	79,00 EUR
612367	IP44 25 m H07RN-F 3G2.5 mm ² reel extension cord (schuko standard)	79,00 EUR
612404	IP44 25 m H07RN-F 3G2.5 mm ² reel extension cord (french standard)	79,00 EUR
612374	IP44 40 m H07RN-F 3G2.5 mm ² reel extension cord (schuko standard)	114,00 EUR
612411	IP44 40 m H07RN-F 3G2.5 mm ² reel extension cord (french standard)	114,00 EUR

PERFECT WORKSHOP LIGHTING

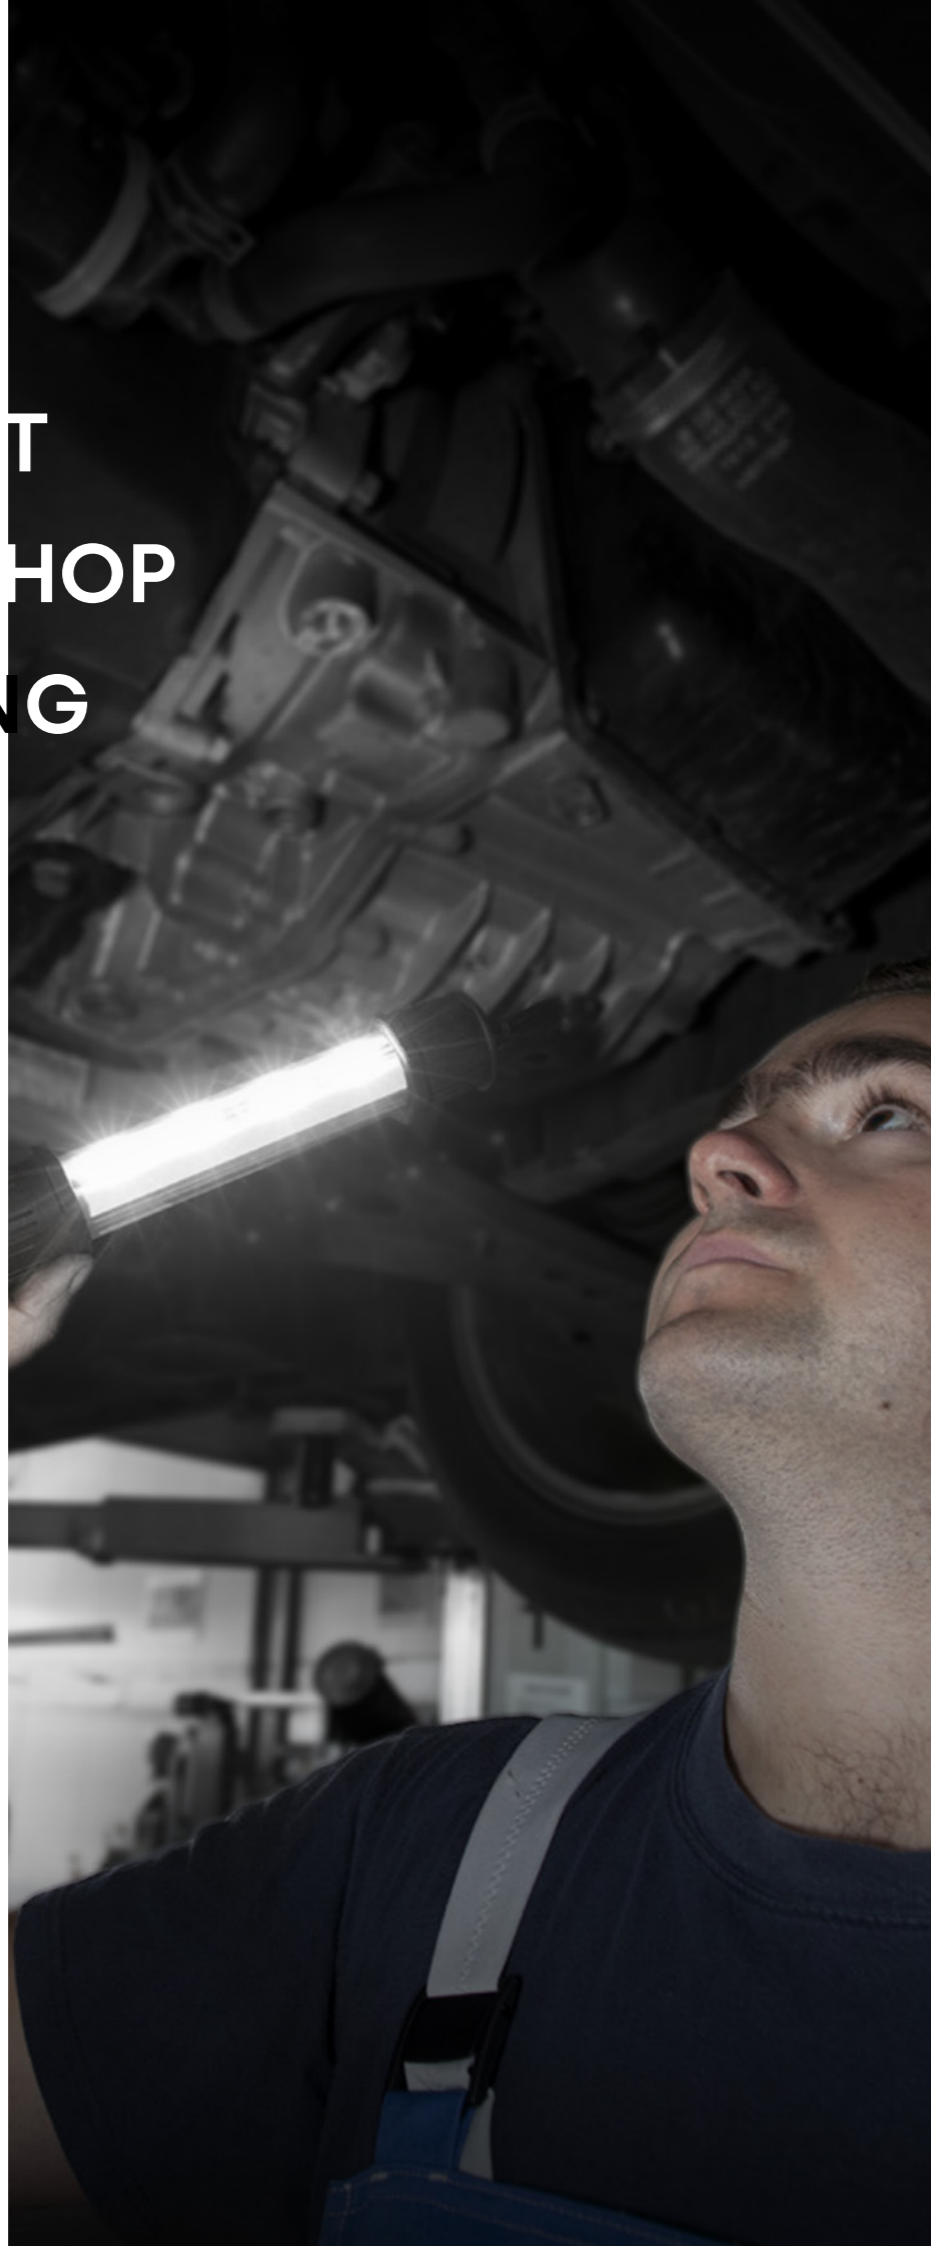







Multi Light LED

The torch and work lamp set is the perfect solution for mechanics, craftsmen, and DIY enthusiasts. It's a modern work lighting system that enables mounting various light heads on a single base (with a battery).

608759	Multi Light LED	69,50 EUR
--------	-----------------	-----------



- 
+
 Head – flexible, thinner, with a zoom function. Useful in hard-to-reach places.
- 
+
 Head – flexible, thicker, with a zoom feature. Useful in hard-to-reach places.
- 
+
 Head – slim workplace luminaire: rotatable 180 degrees with LED panel.
- 
+
 Head – torch: torch with zoom-in and zoom-out function.
- 
+
 Battery – 3.6 V 2600 mAh with a built-in charging port (Type C).
- 
+
 A USB cable with a Type C connector for charging the luminaire or battery.



The suggested prices do not include VAT

The promotional campaign lasts while stocks last!

From the moment the above promotional leaflet comes into force, all current promotional campaigns shall expire. Sale carried out through specialised points only. We reserve the right to correct errors and change technical descriptions of products during the promotion. Prices valid until the end of August 2024.



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 (61) 28 60 300, e-mail: omp@lenalighting.pl

www.lenalighting.com

Distributor: