



MAGNUM 72W/108W

NAŚWIETLACZE / FLOODLIGHTS

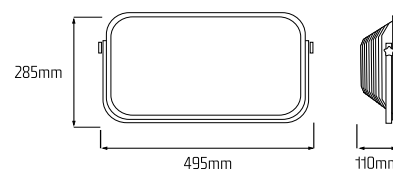

- Źródło światła: świetlówki TC-L (2x36W lub 3x36W)
- Moc: 72W lub 108W
- Maksymalny strumień świetlny (72W): 2600lm
- Maksymalny strumień świetlny (108W): 3400lm
- Trzonek: 2G11
- Typ balastu: EVG
- Stopień szczelności: IP54
- Klosz pryzmatyczny wykonany z poliwęglanu
- Uderzenioodporna obudowa i wielopozycyjne ramię
- Przewód gumowy H07RN-F 2x1,0 mm² (5m)

Opcjonalnie dostępne:

- Jedno lub dwa gniazda wbudowane w tylnej części oprawy
- Przewód gumowy H07RN-F 3x1,5mm² (5m)
- Uchwyty do nawijania przewodu
- Waga: 3,7 kg - 3,9 kg

- Light source: fluorescent tube TC-L (2x36W or 3x36W)
- Power: 72W or 108W
- Total luminous flux (72W): 2600lm
- Total luminous flux (108W): 3400lm
- Lamp holder: 2G11
- Ballast type: EVG
- Ingress protection class: IP54
- Polycarbonate prismatic diffuser
- Impact resistant casing and multi-positional arm
- Rubber cable H07RN-F 2x1,0mm² (5m)

Optionally available:

- One or two sockets at the back of the fitting
- Rubber cable H07RN-F 3x1,5mm² (5m)
- Cable winding holders
- Weight: 3,7 - 3,9 kg

index	moc power [W]	napięcie zasilające power supply [V]	IP	rodzaj wtyczki plug type	gniazda sockets	kl.ochronności protection class	waga weight [kg]
244919	72	220-240	54	UNI-SCHUKO	-	II	3,7
244926	72	220-240	54	UNI-SCHUKO	2xSCHUKO	I	3,9
244933	72	220-240	54	UNI-SCHUKO	2xPL-FR	I	3,9
244940	72	220-240	44	DK	2xDK	I	3,9
MAGNUM 108W							
246623	108	220-240	54	UNI-SCHUKO	-	II	3,8
246630	108	220-240	54	UNI-SCHUKO	1xSCHUKO	I	3,9
246647	108	220-240	54	UNI-SCHUKO	1xPL-FR	I	3,9
246654	108	220-240	44	DK	1xDK	I	3,9



Magnum z dwoma gniazdami /
Magnum with two sockets



Magnum z jednym gniazdem /
Magnum with one socket

